


FO Patch Panel

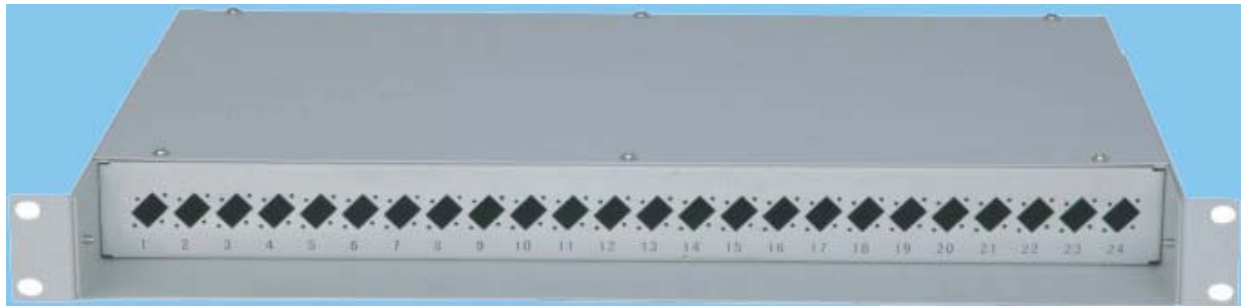

Dimension (L×W×H): 480mm×300mm×1Umm

Features:

- 1 The shell is high intensified & insulated material, thus having excellent mechanic performance and
- 2 it is solid and durable
- 3 fiber in put:4
- 4 Adapters output:24
- 5 strength core and shell was Insulation, add with grounding lead
- 6 Can be installed against wall
- 7 Full accessories for convenient operations

Performance

1. excellent design
2. maximum cores-24
3. fiber lead 、 grounding and perfect fixup 、 reliable
4. pigtail fixup reliable and perfect protection
5. Apply to extensive field
6. convenient operations and maintenance

Specifications:

1. Environment temperature: $-25^{\circ}\text{C} \sim +45^{\circ}\text{C}$
2. Relative humidity: $\leq 85\%$ (30°C时)
3. Atmosphere pressure: 70~106KPa
4. Insulated Resistance: $\geq 2 \times 10\text{M}\Omega / 500\text{V}$ (DC)
5. Intensity $\leq 15\text{KV}$ (DC) / 1minno spark-over and no flying arc
6. Fiber bending radium guaranteed more than 40mm: $\geq 40\text{mm}$

Application: It is applicable for straight-through connection and diverged connection in aerial layout , duct and direct buried. It can protect fiber connectors.