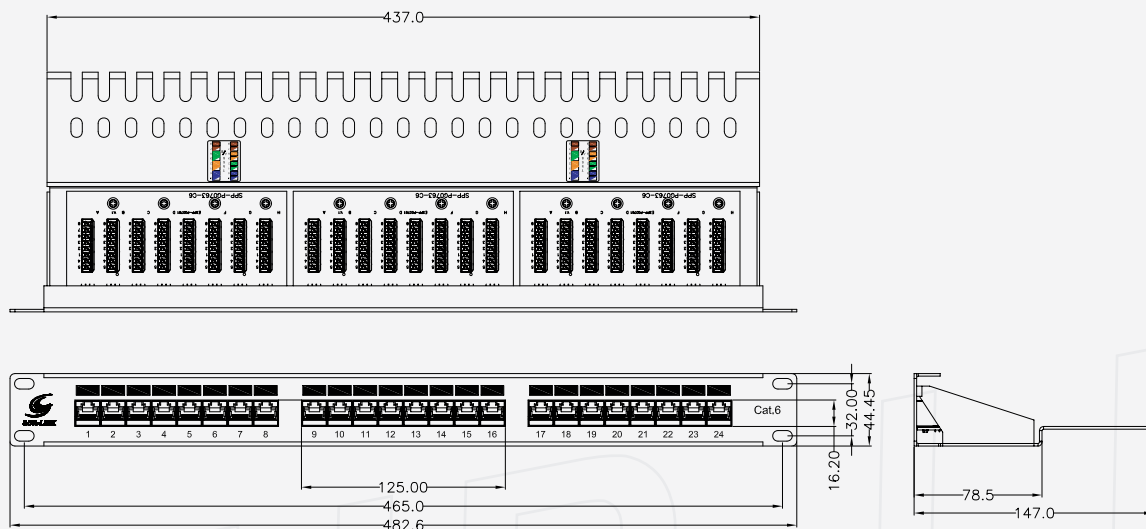


SL6PP2403U104

NOTES:
ELECTRICAL:

- | | |
|-------------------------|------------------------------|
| 1.VOLTAGE RATING | : 125 VAC RMS |
| 2.CURRENT RATING | : 1.5 AMP |
| 3.CONTACT RESISTANCE | : 100 MILLIOHMS MAX |
| 4.INSULATION RESISTANCE | : 1000 MEGOHMS MIN @ 500 VDC |
| 5.DIELECTRIC STRENGTH | : 750 VAC RMS 60Hz,1MIN |

ENVIRONMENTAL:

- | | |
|-------------|----------------|
| 1.STORAGE | : -40° TO +85° |
| 2.OPERATION | : 0° TO 70° |

CONFORM TO ANSI/TIA/EIA-568 B.2-1

MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68

MECHANICAL:

- | | |
|---------------------|--|
| 1. HOUSING MATERIAL | : PBT+15%GF UL94V-0 |
| 2. PANEL FRAME | : CARBON STEEL,POWDER COATING IN BLACK COLOR |
| 3. IDC MATERIAL | : PC UL94V-0 CONTACT:PHOSPHOR BRONZE
WITH TIN PLATING |
| 4. RJ45 JACK LIFE | : 750 TIMES MIN |
| 5. IDC LIFE | : 200 TIMES MIN |
| 6. WIRE | : AWG 24-26 |

PART NUMBER:SL6PP2403U104