


FO Patch Cord

Patch Cord , SC-SC , SM - 9/125 , Simlpex , PVC , OD = 2.0 or 3.0 mm , L=1~100M

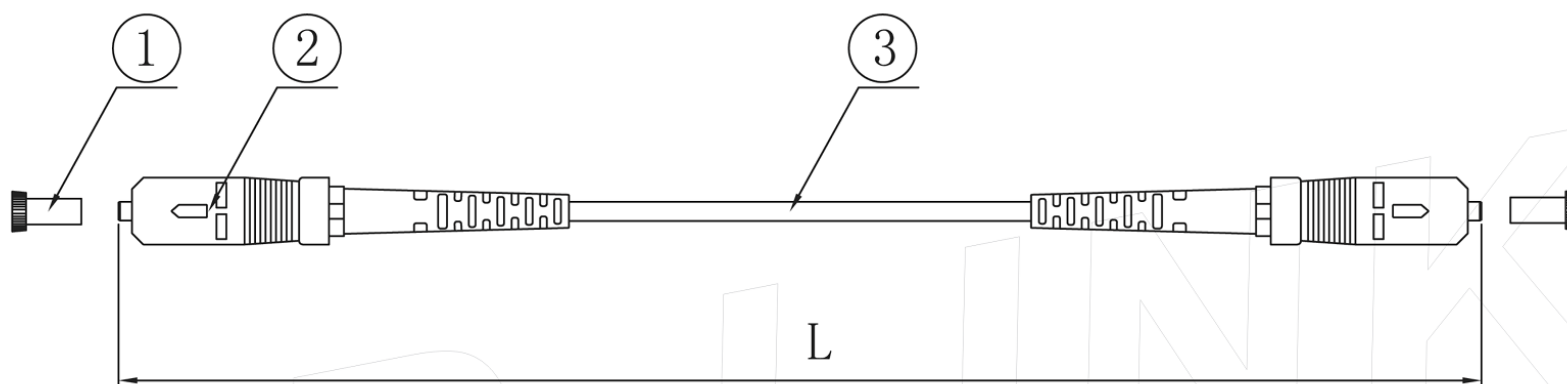

Feature:

- PC ,UPC or APC polishing
- Standard housing, ceramic ferrule
- Cable diameter : 3.0mm, 2.0mm
- Fiber diameter: 9/125 μ m SM
- Insertion loss: Less than 0.3 dB
- Return loss: PC larger than 50 dB , UPC larger than 55dB
APC larger than 60dB
- Repeatability: Less than 0.2 dB
- Changeability: Less than 0.1 dB
- Operating Temperature range: -20 $^{\circ}$ c ~ +70 $^{\circ}$ c
- Storage Temperature range: -40 $^{\circ}$ c ~ +80 $^{\circ}$ c
- Tensile strength : 10kgf
- Min. Bending Radius: 4cm(Loaded); 2cm(Unloaded)

Patch Cord is in compliance with the following specifications:

- ISO/IEC 11801 & TIA/EIA-568A
- For Cable: TIA/EIA -568B.3, Bellcore GR-409, UL OFNR/FT4

ITEM	DESCRIPTION				QTY
1	T Cap				2
2	SC Connector				2
3	2.0 or 3.0mm , SM FO Cable				1~100m
Version	SLV 1.0	Unit	N/A	Customer	
Design By	P.C	Scale	N/A	Approved By	W.B.Z

