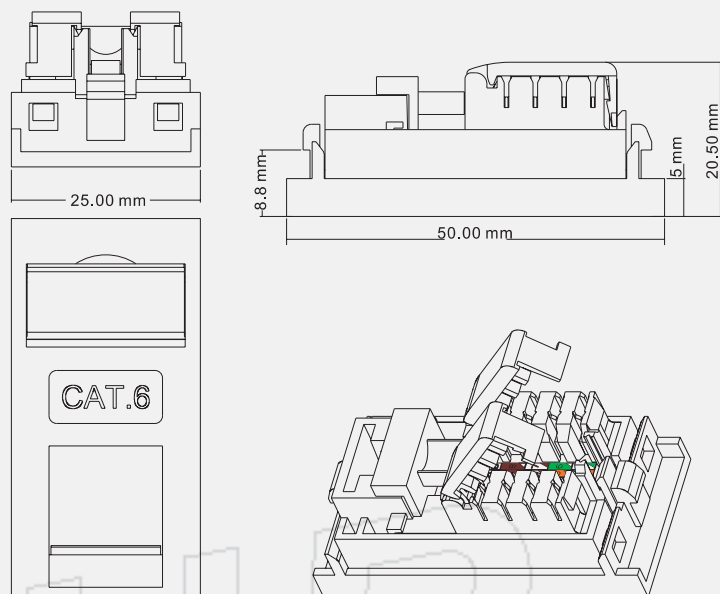


**SL6KJUT015202**
**Presentation**

**Photo**

**Main Describe of The Product:**

- 1.** Unshielded KJ. The products are used in the Equipment Rooms & Work area as communication connectors of the intelligent Buildings.
- 2.** The structure of the Keystone Jack is compact, that can make your work more easy and fast. The original punching cover dust-free cover can prevent the cable to break off from the IDC ports.
- 3.** According with ISO/IEC 11801:2002 Class E & ANSI/TIA/EIA/568-B.2-1 CAT.6 standard.
- 4.** According with T568A & T568B. The T568A & T568B labels are adhibited on the both sides of the product to give a exact guide when a engineer punches the cables.
- 5.** Connecting: RJ45 port for STP patch cord and the IDC port for STP horizontal cabling.
- 6.** According with ROHS requirement.
- 7.** Fit for Cat.6 Cabling systems, can also be used on Cat.5 and Cat.5e cabling systems.

**Technique Characteristics:**

- 1.** Housing and other plastic parts' material: PC UL94V-0
- 2.** 8 Pin of the RJ45 jack: Phosphor bronze with 50U golden cladding. Insertion Dependability: 750 times.
- 3.** IDC Clips: Tinned phosphor bronze pins. Fit for 22AWG/23AWG/24AWG Cables. Punching Dependability: 250 times.
- 4.** Punching Tools: Toolless type use the punching cover Assembly the cables.
- 5.** Testing condition of transmitting capability : 100MHz